


1. Remove inside windshield frame leaving center bar but removing clips top & bottom.
 2. Remove sun visor brackets & dome light.
 3. Put headliner in place.
 4. Replace sun visor brackets & dome light & insert screws. Fold binding under (staple or use carpet tacks)
 5. Replace inside windshield frame & clips
 6. Needed for inside mirror if have solid windshield 1960 & Up
-

2. Passenger Side Piece
3. Drivers Side Piece

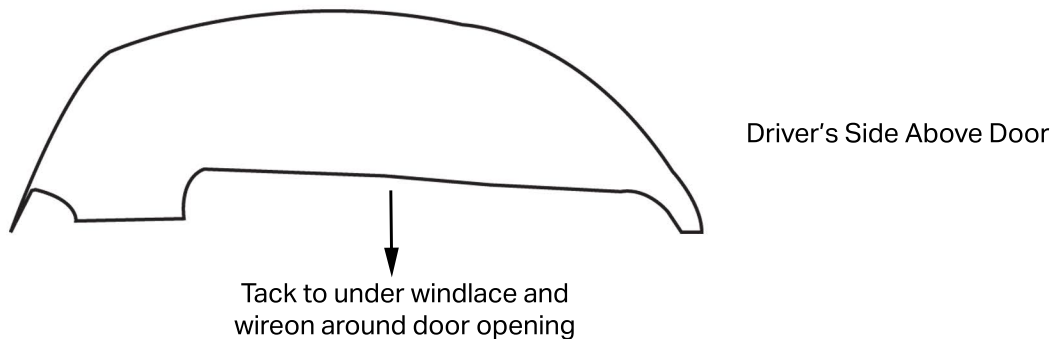

pass - opposite